

HONEYCOMB HEAT EXCHANGER

A compact, lightweight design for easy handling and installation. PFA tubes, in a honeycomb pattern, are fused to a PTFE sleeve using a proprietary Nippon Pillar process.

This creates a larger cooling/heating surface area in a smaller package.

Custom designs are available for special applications. See Nippon Pillar for details.



TYPE : **HEW**



TYPE : **HEM**




TYPE : **HEP**

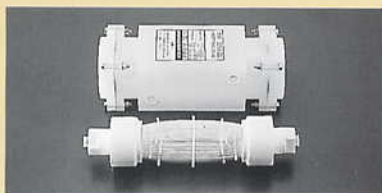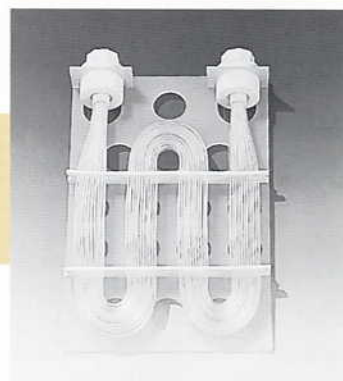

Type HEST (Shell & tube)



Honeycomb tube end

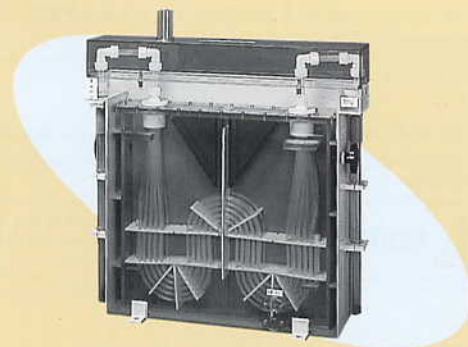

Module type


FEATURES

- All PTFE wetted parts. Can operate continuously in saturated vapor.
- PFA, with its low coefficient of friction, won't scale, plate, or stain.
- Efficiency stays high. Smooth wall tubing won't trap particulate.
- All PFA tubes are molded in a class 1000 Clean Room.
- Pressure rating at various temperature

kgf/cm ²	(psi)	°C	(°F)
5.0	(71.42)	0	(32)
5.0	(71.42)	60	(140)
3.4	(48.57)	100	(212)
2.2	(31.43)	130	(266)
1.0	(14.28)	160	(320)


Thermal Heat Transfer Coefficient 80-180Kcal/m² Hr°C
(317.4-714.2BTU/m² Hr°C)

HEM Module type

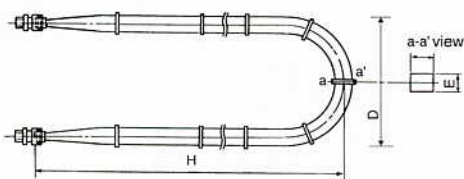

TYPE	HEAT TRASFER AREA (m ²)	EFFECTIVE LENGTH (mm)	WIDTH D (mm)	HIGHT H (mm)	THICKNESS E (mm)
HEM 37-04A	0.4	1340	200- 600	560	50
HEM 37-07A	0.7	2147	400- 800	900	
HEM 37-10A	1.0	2954	600-1000	1250	
HEM 91-10A	1.0	1368	200- 600	570	60
HEM 91-15A	1.5	1915	400- 800	790	
HEM 91-20A	2.0	2462	500- 900	1030	
HEM 91-25A	2.5	3009	600-1000	1280	
HEM 91-30A	3.0	3556	700-1100	1520	
HEM 91-35A	3.5	4103	800-1200	1770	
HEM 91-40A	4.0	4650	800-1200	2040	
HEM140-25A	2.5	2052	400- 800	860	70
HEM140-30A	3.0	2407	500- 900	1000	
HEM140-35A	3.5	2763	500- 900	1180	
HEM140-40A	4.0	3118	600-1000	1330	
HEM140-50A	5.0	3829	700-1100	1660	
HEM140-60A	6.0	4540	800-1200	1990	
HEM140-70A	7.0	5251	800-1200	2340	
HEM140-80A	8.0	5962	800-1200	2700	


HEW W type

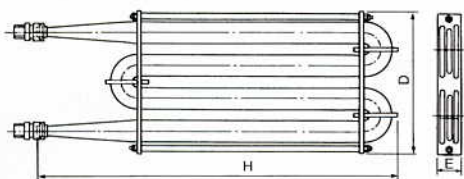

TYPE	HEAT TRASFER (m ²)	EFFECTIVE LENGTH (mm)	WIDTH D (mm)	HIGHT H (mm)	THICKNESS E (mm)
HEW 91-15A	1.5	1915	570	620	60
HEW 91-20A	2.0	2462		760	
HEW 91-25A	2.5	3009		890	
HEW 91-30A	3.0	3556		1030	
HEW 91-35A	3.5	4103		1170	
HEW 91-40A	4.0	4650		1300	
HEW140-25A	2.5	2052		650	
HEW140-30A	3.0	2407	750		
HEW140-35A	3.5	2763	840		
HEW140-40A	4.0	3118	930		
HEW140-50A	5.0	3829	1100		
HEW140-60A	6.0	4540	1280		
HEW140-70A	7.0	5251	1460		
HEW140-80A	8.0	5962	1640		

○Larger heat transfer area in compact size.


HEP Panel mount type

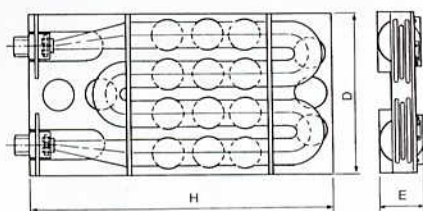

TYPE	HEAT TRASFER (m ²)	EFFECTIVE LENGTH (mm)	WIDTH D (mm)	HIGHT H (mm)	THICKNESS E (mm)
HEP37-04AP	0.4	1340	340	465	65
HEP37-07AP	0.7	2147		670	
HEP37-10AP	1.0	2954		870	


○Folding tubes installed on polypropylene panel with end connectors.

End Connectors



TYPE	NUMBER OR TUBE	CONNECTION SIZE (PT/NPT)	LENGTH A	DIA. φ D	THICKNESS H	DIAMETER φ J
CN 37-F 8A	37	1"	72	65	7	56
CN 91-F 8A	91	1"	77	90	7	76
CN 91-F12A	91	1-1/2"	77	90	7	76
CN140-F 8A	140	1"	77	90	7	76
CN140-F12A	140	1-1/2"	77	90	7	76

PFA tube dimension (mm)



Note : PTFE connector is limited to be used in lower than 2kgf/cm²G (28.57psi) or 132°C (295°F) of saturated vapor pressure.

How to order

HE M 91-15 S P
 ① ② ③ ④ ⑤ ⑥

- ① Heat exchanger
- ② M : Module type, W : W type, P : Panel mount type, ST : shell & tube
- ③ Number of tubes ④ Heat transfer area (ex. 04 : 0.4m²-80 : 8.0m²)
- ⑤ End connector material : S-SUS316, T-Titanium, A-PTFE
- ⑥ Panel material : P-Polypropylene (for HEP type only)

PILLAR



ISO-9001

NIPPON PILLAR PACKING CO., LTD.

Head Office: 11-48, Nonakaminami 2 chome, Yodogawa-ku, Osaka, 532 Japan

Tel : 81-6-305-1900 Fax : 81-6-302-3300

Tokyo Office : 2-2, Uchisaiwaicho 2 chome, Chiyoda-ku, Tokyo, 100 Japan

Tel : 81-3-3508-1611 Fax : 81-3-3508-1881

Nippon Pillar Singapore Pte, LTD : 2 Jurong East Street 21, #05-11 IMM Building, SINGAPORE 2260

TEL : 65-568-2392 Fax : 65-568-2430

* Specifications and dimensions are subject to change without prior notice
 * The data on this catalogue are solely for your reference and are not to be construed as constituting a warranty.



• Read through and follow the instructions on the manual before installation and operation for your safety.

Edwards
EMI
 Manufacturing Inc.



2441 SE Stubb St.
 Milwaukie, OR 97222
 Ph: (503) 659-4198
 Fx: (503) 659-4696