

STOP VALVE & CHECK VALVE



STOP VALVE


Feature

- All wetted parts are made of NEW PFA and PTFE suitable for use in high purity and high corrosive chemical handling applications.
- It is available in a wide range of temperatures from 0°C to 100°C {32°F~212°F}
- The valve body and super 300 fitting are injection-molded into a one piece PFA body with a very smooth surface.

Specifications

Type : PSV
 Operation method : **Manual**
 Connecting method : **Tube fitting (Super 300 type fitting)**
 Max operation pressure : **0.7MPaG {99.54PSIG}**
 Max operation temperature : **100°C {212°F}**
 Ambient temperature : **60°C {140°F}**
 Fluid : **Chemical & DI water liquids**

Operation pressure and Temperature range

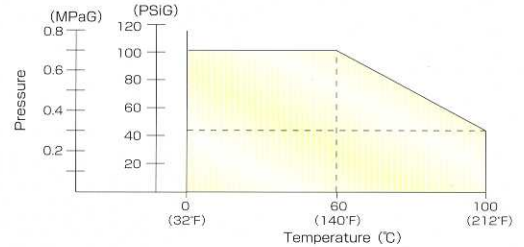

PSV- P06B~P12B
PSV- PW2B~PW4B

PSV-P19B, P25B
PSV-PW6B, PW8B

Main parts list

Parts	No.	Parts	Material	Parts	No.	Parts	Material
Wetted parts	1	Valve body	PFA	Non-wetted parts	5	Union nut	PFA
	2	Stem	PFA		6	Outer ring	P,P
	3	V-ring set	PTFE		7	Knob	P,P
	4	Sleeve	PFA				

Demension

mm Tube											mm (inch)	
Type No.	TUBE SIZE O.D.XI.D	H (MAX)	A	B	C	D	t1	P1	P2	φK	φS	
PSV-P06B	6× 4	79 (3.11)	64 (2.52)	17 (0.67)	43 (1.69)	16 (0.63)	5 (0.20)	31 (1.22)	—	30 (1.18)	4 (0.16)	
PSV-P08B	8× 6	84.5 (3.33)	72 (2.83)	19 (0.75)	44 (1.73)	17.5 (0.69)	5 (0.20)	32 (1.26)	—	30 (1.18)	5 (0.20)	
PSV-P10B	10× 8	94 (3.70)	84 (3.31)	24 (0.94)	51 (2.01)	21 (0.83)	7 (0.28)	38 (1.50)	—	35 (1.38)	7 (0.28)	
PSV-P12B	12×10	104 (4.09)	95 (3.74)	27 (1.06)	55 (2.17)	23 (0.91)	7 (0.28)	42 (1.65)	—	42 (1.65)	9 (0.35)	
PSV-P19B	19×15.8	121 (4.76)	119 (4.69)	36 (1.42)	60 (2.36)	28 (1.10)	7 (0.28)	46 (1.81)	22 (0.87)	50 (1.97)	14 (0.55)	
PSV-P25B	25×22	151 (5.94)	148 (5.83)	50 (1.97)	79 (3.11)	33 (1.30)	7 (0.28)	62 (2.44)	33 (1.30)	70 (2.76)	20 (0.79)	
inch Tube											mm (inch)	
Type No.	TUBE SIZE O.D.XI.D	H (MAX)	A	B	C	D	t1	P1	P2	φK	φS	
PSV-PW2B	6.35× 3.95	79 (3.11)	64 (2.52)	17 (0.67)	43 (1.69)	16 (0.63)	5 (0.20)	31 (1.22)	—	30 (1.18)	4 (0.16)	
PSV-PW3B	9.53× 6.33	94 (3.70)	84 (3.31)	24 (0.94)	51 (2.01)	21 (0.83)	7 (0.28)	38 (1.50)	—	35 (1.38)	7 (0.28)	
PSV-PW4B	12.7 × 9.5	104 (4.09)	95 (3.74)	27 (1.06)	55 (2.17)	23 (0.91)	7 (0.28)	42 (1.65)	—	42 (1.65)	9 (0.35)	
PSV-PW6B	19 ×15.8	121 (4.76)	119 (4.69)	36 (1.42)	60 (2.36)	28 (1.10)	7 (0.28)	46 (1.81)	22 (0.87)	50 (1.97)	14 (0.55)	
PSV-PW8B	25.4 ×22.2	151 (5.94)	148 (5.83)	50 (1.97)	79 (3.11)	33 (1.30)	7 (0.28)	62 (2.44)	33 (1.30)	70 (2.76)	20 (0.79)	

Remarks : Super Fitting is also available.